




BOOSTER FAN UG-2

Extra booster fan with operating voltage 24VAC.
The fan is provided with an electronic voltage unit changing 24VAC to 12VDC.
Consumption = 1.0VA (50mA)



FILTER F-UG 2

Dust filter.
For installation having bad air quality.



MOUNTING BRACKET UG-BESLAG

For moutage of the Uniguard smoke detector on to circular or insulated flat ducts.



VENTURI PIPE VENTRÖR


VENTURI PIPE 0,6M
VENTURI PIPE 1,5M
VENTURI PIPE 2,8M

For ducts smaller than 0,6 m use venturi pipe length 0,6 m.
For ducts between 0,6 and 1,3 m use venturi pipe length 1,5 m.
For ducts over 1,4 m a use venturi pipe length 2,8 m.



SIGN "HIDDEN SMOKE DETECTOR"

For smoke detectors in elevator engine rooms or detectors mounted above suspended ceilings.

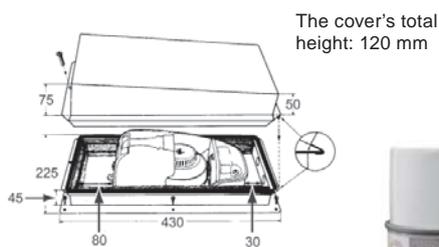

The cover's total height: 120 mm

Volume 250 ml




PROTECTION COVER UG-SH

Is used as covering protection for Uniguard smoke detector mounted outdoors or in cold attics. To avoid that hot outlet air is condensating.

SMOKE DETECTOR TESTER RDP-300

For testing of smoke detectors.
The unit is provided with a spray nozzle.
The spray bottle can be used for many tests.
The spray will work on ion- and optical smoke detectors.

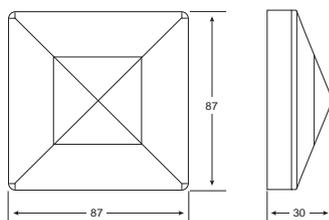

LED INDICATION LED-03

For showing location of hidden smoke detector.
Maximal cable length 3 m.