

UG-COVER-75 PROTECTION HOUSING

for Uniguard Superflow duct smoke detectors UG-5 and UG-7



GENERAL INFORMATION

UG-COVER-75 is used as covering protection for Uniguard Superflow duct smoke detector. When Uniguard is mounted in places where possible condensation problems could arise, e.g. in cold attics or outdoor, use UG-COVER-75 to avoid condensation of hot outlet air.

INSTALLATION

In places where possible condensation problems could arise, install the UG-COVER-75 horizontally to obtain the protection class IP54.


A sign should be used to show location of the detector.

TECHNICAL DATA

| | |
|-------------------------------------|------------------------|
| Suitable for detector model: | UG-5 and UG-7 |
| Material | |
| Housing: | PC |
| Insulation: | Foamed PE, 6,4 mm |
| Cable gland: | 2xM20, Ø 8-13 mm cable |
| Dimensions (WxHxD): | 292x122x460 mm |
| Weight: | 700 g |
| Protection: | IP54 |


DIMENSIONS

(mm)

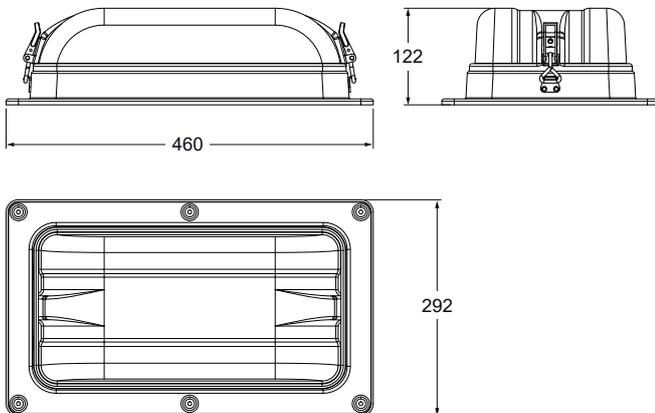

HIDDEN SMOKE DETECTOR

Sign

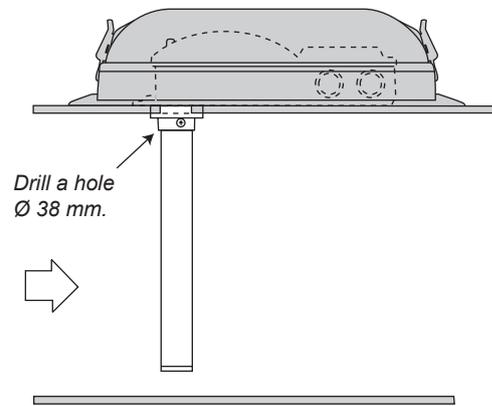

ORDERING EXAMPLE

| Article code | Description |
|--------------|---|
| UG-COVER-75 | Protection housing (for mounting outdoors, in cold attics etc.) |